

**DEMOLITION DERBY
WEST COAST SPEEDWAY ASSOCIATION**

OFFICIAL ENTRY FORM

I, the undersigned fully realize that all person having any connection with the West Coast Speedway Assn Inc and/or conduct of the meeting, including the drivers and owners of vehicles and passengers in the vehicles, are absolved from all liability rising out of accidents causing damage or personal injury to Drivers, Spectators, ticket holders or any other person, fatal or otherwise.

Entrants must hold at least a restricted driver's license.

I HEREBY AGREE TO FULLY COMPLY WITH THE ABOVE RULES
CONDITIONS AND OFFICIALS

NAME:_____

CAR MAKE:_____

MODEL_____

YOUR CAR NUMBER IS:_____

SIGNATURE:_____

DATE:_____

SCRUTINEERS SIGNATURE_____

NOTE: Racing starts at 4pm. Pit Gate closes at 3pm. All derby cars must be in the pits before 3pm. Only derby car driver gets free entry.

Derby entry \$20 per car Day license will need to be paid for from the
speedway nz website www.speedway.co.nz \$60

A Derby Diver's Meeting will be held before racing starts.


All cars must be moved from the track at the end of the day.

Bring completed forms with you on race day.

D1 DEMOLITION DERBY RULES AND SPECIFICATIONS INCLUDING CARAVAN, TEAMS AND RAMP DERBIES

D1-1 Demolition Derby Minimum Vehicle Specifications

- D1-1-1** Only standard road cars eligible. NO 4-wheel drives, NO SUV's, NO Ute's.
- D1-1-2** No modifications or reinforcing permitted except the following. UNLESS IT SAYS YOU CAN THEN YOU MUST NOT.
- D1-1-3** All glass including mirrors to be removed from the vehicle. One interior mounted factory style mirror is permissible
- D1-1-4** Tow bar to be removed.
- D1-1-5** All badges, interior and exterior trim and plastic to be removed.
- D1-1-6** Both front doors to be securely chained, bolted or welded shut.
- D1-1-7** Pillarless cars must have the seam between front and rear doors fully welded.
- D1-1-8** Full harness seat belt (4-5 point) to be fitted to driver's seat and securely mounted.
- D1-1-9** Seat belts must not be mounted to the roof.
- D1-1-10** NO RETRACTABLE SEAT BELTS allowed.
- D1-1-11** A maximum of 18 litres of petrol to be carried in the tank.
- D1-1-12** All cars to be fitted with roll bar (not roll cage) consisting of one bar of minimum diameter of 38mm OD x 3.2mm, of steam pipe or RHS, to extend vertically from floor immediately behind driver's seat to the roof. A 300mm length of pipe or RHS (of the same size as the roll bar), or a 300mm x 300mm x 6mm plate must be welded to each end of the roll bar. These to be bolted through the roof and the floor using a minimum of 10mm bolts. A head rest must be mounted on bar. See diagram below.

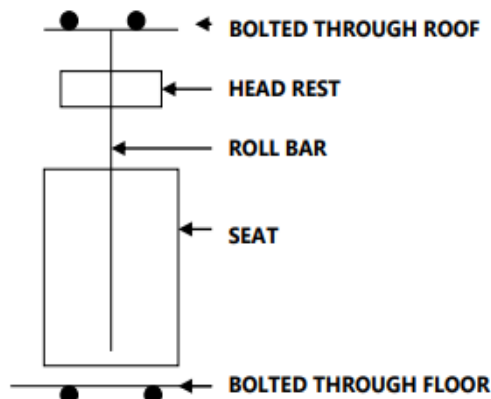

- D1-1-13** Numbers must be painted in contrasting colours and clearly visible, on the driver's door and roof. Minimum size 300mm high x 50mm wide.
- D1-1-14** No obscene or offensive words or drawings on cars.
- D1-1-15** The driver's door may have a 3mm steel plate welded on the driver's side to replace the door trim, from behind the driver's seat, extended to past the firewall, and securely welded or bolted.
- D1-1-16** No locked diffs allowed.
- D1-1-17** No wide wheels, racing tyres or spacesaver tyres allowed.
- D1-1-18** Battery must be adequately secured.
- D1-1-19** All airbags must be removed.
- D1-1-20** Fuel lines to be secured with no leaks or kinks, and of an approved type.
- D1-1-21** Minimum helmet clearance of 50mm
- D1-1-22** Bolts holding down the front of a bonnet to be a maximum of 16mm